



Trimless Recessed Neon-Flex S4

Extend a well-fitted, well-finished, well-lit look from ceiling to wall.



Recessed LED Linear Lights with Wings

A well-fitted look of Neon-Flex S4 saves you more room while adding a refreshing appeal.

Trimless Neon-Flex is the one that can help you enhance that, outweighing other flush mounting types no matter plaster-in channels or channels with the lens in the market. It has a pair of luminous “wings” to cover the gap of oversized slotting, and most importantly, the edges of mounting profiles “disappear” after the lights are fitted, delivering a sense of warmth to the space without the disturbing metallic element.

Ideal for routing into wood, stone, or drywall as under cabinet lighting, built in ceiling lighting, recessed wall lighting, and soffit recessed lighting.



Features

★ Neat Installation

Nothing can be noticed except the emitting surface in opal color after the installation in a close-up view. It is all in the detail. This extraordinary recessed lighting enables you to create a more clutter-free living room than ever.

★ Perfect Fit


Unlike rigid recessed linear fixtures, it provides made-to-order lengths and undulating shapes that perfectly fit the mounting surface.

★ Widened Visual Effect


The “wings” of Neon-Flex linear extend the luminous surface, distributing the brightness to more areas at an adequate size. It gives a new lease of life to the monotonous background.

★ IP67 Waterproof

Suitable for outdoor environments and also indoor use such as the bathrooms, kitchens and vanities where dampness or moisture are present.

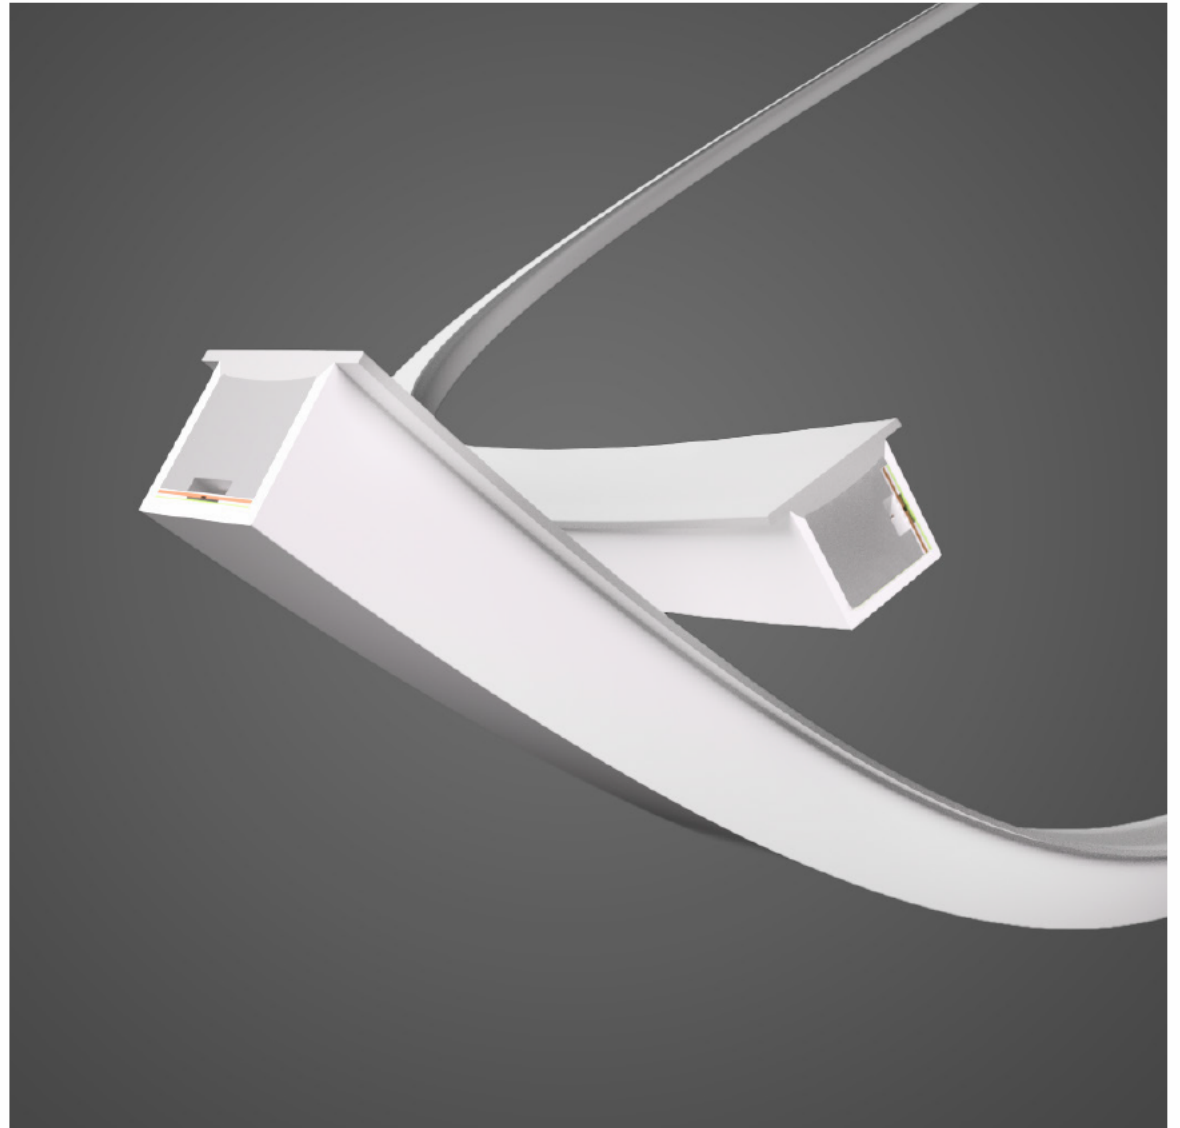

Light

	Article No.	TL S4AF VB	TL S4BF VB	TLS4BF VB	TL S4DF VB	TL S4EF VB	TL S4SF VB			
	Light Color									
Voltage & Circuit Type		24CV	24CC	24CC	24CV	24CV	24CC	24CC	24CC	24CC
Power/m		2W	8W	2W	2W	5W	2W	0W	6.5W	22W
Lumen/m		300 lm@R+G+B	/	>420 lm@3000K	> 80 lm@5700K	> 90 lm@RGBW(3000K)	>340 lm@3000K	> 50 lm@5700K	300 lm@R+G+B	> 90 lm@RGBW(3000K)
Min. Cutting Length (mm)		83.3	83.3	55.6	83.3	83.3	83.3	00	83.3	83.3
Max. Running Length (m)		7m	5m	0m	0m	5m	0m	0m	5m	5m

Connector ▶ IP67 Injection moulded Connector



Mounting Profile

Name	Aluminum Profile	Serrated Aluminum Profile	Bendable Serrated Aluminum Profile	Stainless Steel Profile
Picture				
Item Code	A/LP	SA/LP	BSA/LP	SS/LP
Length (mm)	35, 500, 1000, 2000	20, 500, 1000, 2000	500, 1000	35
Applicable to		  	  	  

Application

