

Article: Salt spray test report

File No.: LP-1307001

2 Pages

1. Test Object

LED Neon Flex and accessories
Series-3 - 4, 4pcs

2. Test Target

Evaluate light and accessories' resistance to salt spray

3. Reference Standard

IEC68-2-11
GB/T2423.17-93

4. Test Equipment

Salt spray chamber, model: YWX-60

5. Test Condition

1. Salt solution (sodium chloride, 5% concentration) PH range from 6.5~7.2.
2. Test temperature at 35°C , last for 20 days

6. Test Photo


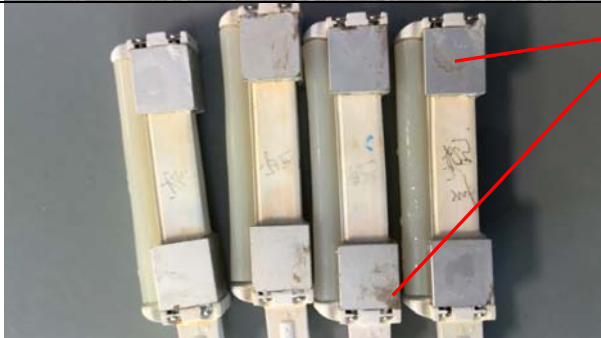
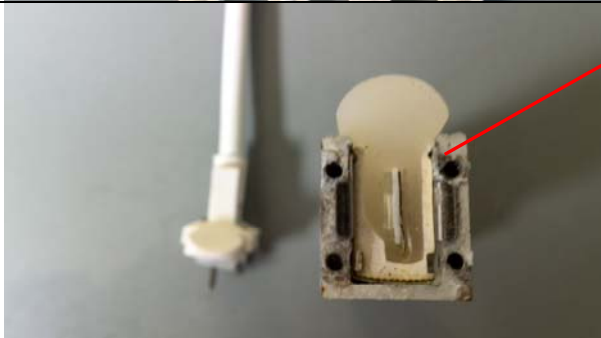



Article: Salt spray test report

File No.: LP-1307001

2 Pages

7. Test Result

Condition	Photo	Description
Before test		In chamber
After test		Only tiny stain on metal piece surface
		Only tiny stain on metal piece surface
		Only tiny stain on metal piece surface

Article: Salt spray test report

File No.: LP-1307001

2 Pages

8. Evaluation of test results

After test, only the metallic parts which are exposed in salt spray air has tiny stain on its surface.

However, the PVC part, Silicon sheet, inner metal Pins and PCB keep immune from salt spray test.