LEDPRO

Ultra Slim Linear Track Light
With intrack driver design

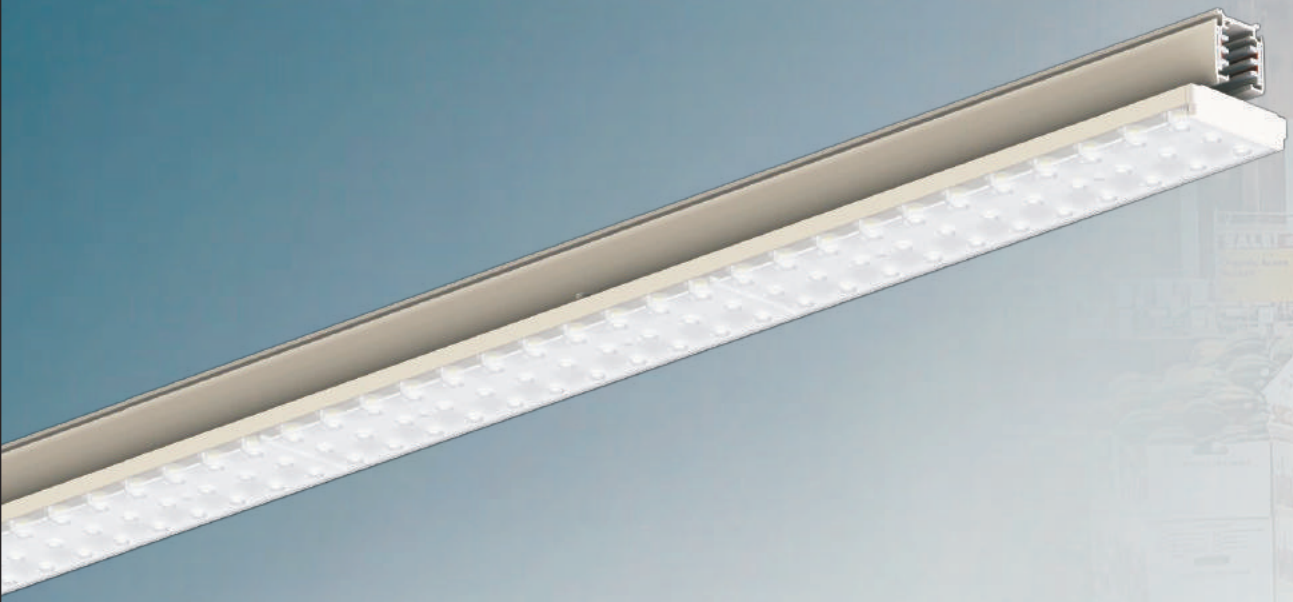

CE ROHS IP 20

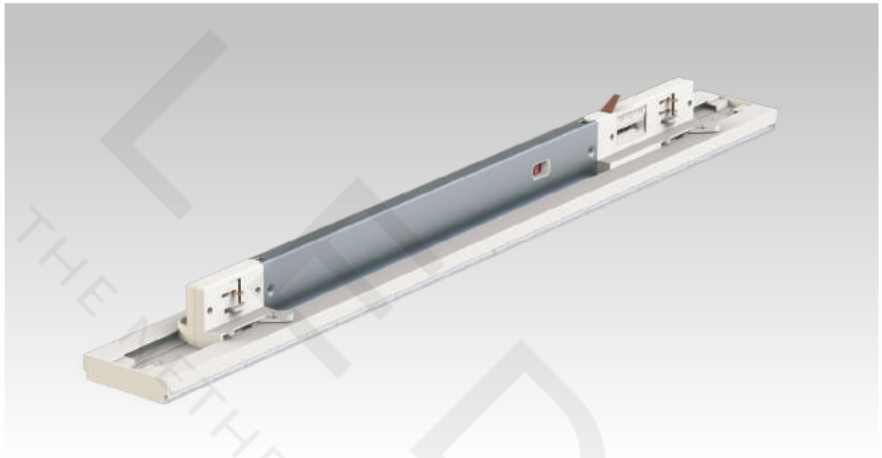

L	W	H
607	64	54
1504	64	54

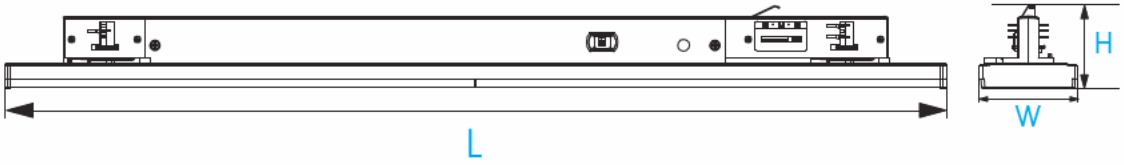

Features

- Store image differentiation by creating contrasts while uniformly illuminating produce on shelves
- Excellent high efficient light quality matching application needs and preferences Freedom in position during and after installation
- Easy installation and removal

Approval

Driver

TOK 达科

Light distribution

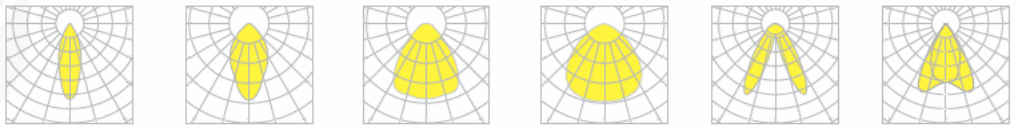

30° 60° 90° 120° Double Asymmetric DA60°

LED PRO
THE NETHERLANDS | HONG KONG | CHINA

Technical details

- Power: 27W (24W/22W/20W/18W/16W/14W/12W)
  61W (54W/46W/38W/35W/30W/25W/20W)
- LM/W: Max.160lm/w
- Beam angle: 30°, 60°,90°,120°,DA25°,DA60°
- CCT:3000K/4000K/5000K/6000K
- Ra:83
- SDCM: <4 Steps
- Color:RAL 9003(white)/RAL 9011(black)
- IP grade:IP20
- IK grade:IK06
- Operating Temperature:-20℃-45℃
- Humidity:<90%
- Useful lifetime:>50,000 hours (L70B10)@25℃ Ta.
- Warranty: 5 year

Driver details

- Input voltage: 220-240VAC
- Output voltage:140-190VDC
- Output current adjustable:Dip switch
- PF:0.95
- THD:<15%
- Protection class: I
- Switch circle:>50,000
- Start time:<0.25s
- Surge protection: 2kv
- Warranty: 5 year

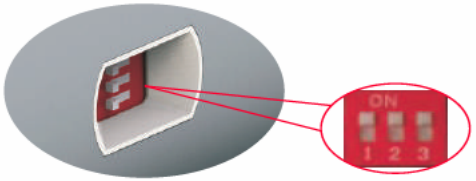

1.5M

PI	Irated	1	2	3
61W	360mA	—	—	—
54W	315mA	ON	—	—
46W	270mA	—	ON	—
38W	225mA	ON	ON	—
35W	200mA	—	—	ON
30W	175mA	ON	—	ON
25W	145mA	—	ON	ON
20W	110mA	ON	ON	ON

Before use,always check dipswitch settings

0.6M

PI	Irated	1	2	3
27W	370mA	—	—	—
24W	340mA	ON	—	—
22W	300mA	—	ON	—
20W	260mA	ON	ON	—
18W	240mA	—	—	ON
16W	210mA	ON	—	ON
14W	180mA	—	ON	ON
12W	150mA	ON	ON	ON

Before use,always check dipswitch settings

3-Phase adjustable by dip switch design

3-Phase adjustable L1/L2/L3

Apply to the below brands track rail

Global Eutrac Staff Ivela Unipro Stucchi Erco

LEDPRO THE NETHERLANDS | HONG KONG | CHINA

Application: Supermarkets, Hypermarkets, Large Retail, Mass Electronics and Convenience stores